


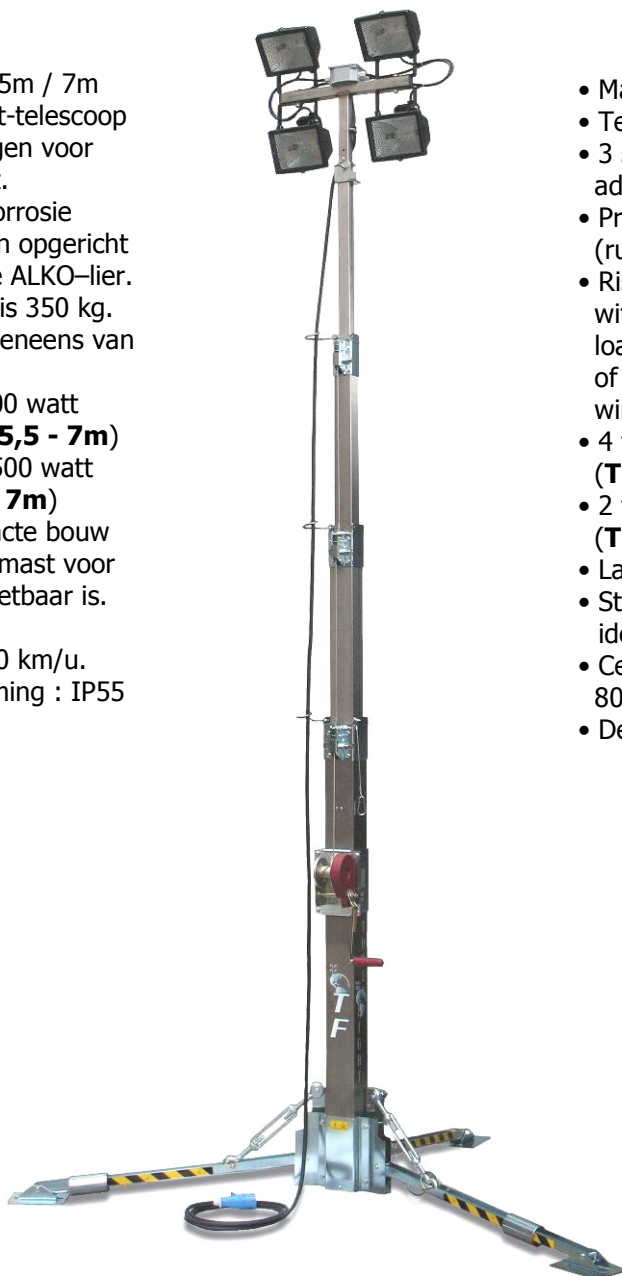


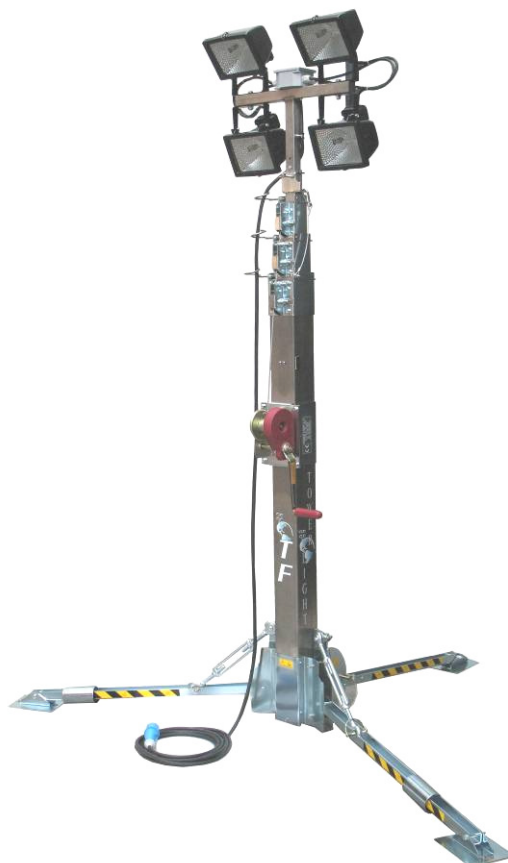

- Maximale hoogte 5,5m / 7m
- roestvrij stalen mast-telescoop
- 3 stabilisatoren zorgen voor een stabiele lichtmast.
- Beschermd tegen corrosie
- De mast kan worden opgericht met de handbediende ALKO-lier. Maximale capaciteit is 350 kg. De staalkabels zijn eveneens van roestvrij-staal.
- 4 armaturen met 500 watt halogeenlampen. (**TF5,5 - 7m**)
- 2 armaturen met 1500 watt halogeenlampen. (**TF 7m**)
- De sterke en compacte bouw maakt dat de TF-lichtmast voor veel toepassingen inzetbaar is.
- Gecertificeerd tot windsnelheden van 80 km/u.
- Graad van bescherming : IP55

- Maximum height 5,5m / 7m
- Telescopic stainless steel mast
- 3 stabilizers galvanized adjustable in height
- Protected against oxidation (rust)
- Rising system with manual winch with automatic brake, maximum load capacity 350 Kg and system of stainless steel ropes 133 wires.
- 4 floodlights 500W halogen (**TF 5,5 - 7m**)
- 2 floodlights 1500W halogen (**TF 7m**)
- Lamps complete of bulb
- Strong and compact structure ideal for each type of application
- Certified wind stability until 80 Km/h
- Degree of protection IP55

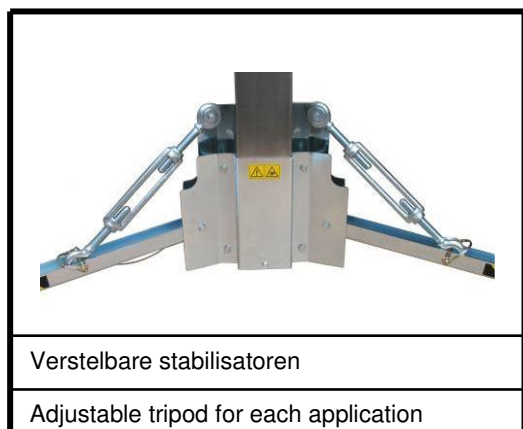

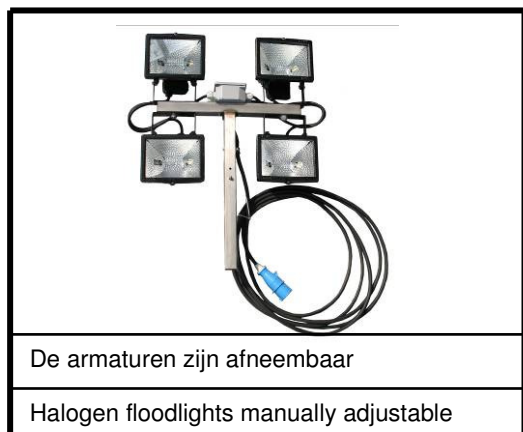

Afmetingen en gewicht – Dimensions and weight

Dim.min (cm) TF 5,5m	35x40x190
Dim.min (cm) TF 7m	35x40x235
Dim. max (cm) TF 5,5m	202x150x550
Dim. max (cm) TF 7m	202x150x700
Gewicht (Kg) TF 5,5m	64
Gewicht (Kg) TF 7m	75

Verlichtings oppervlakte - Illuminated area

TF 5,5m 4x500W - 625m ²
TF 7m 4x500W - 750m ²
TF 7m 2x1500W - 1200m ²

Karakteristieken – Features

Roteerbaar/Rotation	NEE
Lampen/Floodlights	halogeen/halogen
Sterkte lampen/Lamps	4x500W (TF 5,5/7) 2x1500W (TF 7)
Aantal secties / Sections	4
Opties:	NO